Notice of Discontinuation

Company: KYCON, Inc.

305 Digital Dr.

Morgan Hill, CA 95037

USA

408-494-0330

RE: KDMIX-FS2-WS-B15-KTTR1

Due to broken tooling, the above part number is no longer available. Kycon will offer an alternative part number. Below is a redline illustrating the differences between the two parts. We recommend sampling the alternative part.
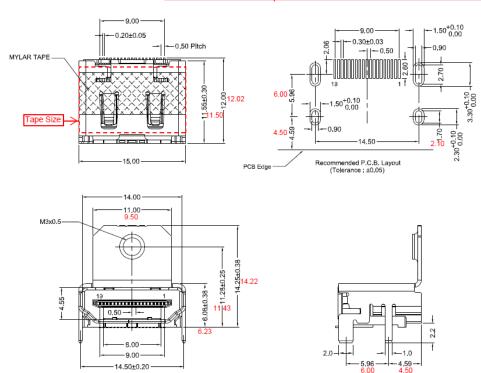Please contact your Kycon sales representative for more information.

Alternative part number: **KDMIX-FS2-WS-B15-MTTR-1**

Signature: _Jill Sca_____

Name: Jill Scarnecchia   Phone: 408-494-0330

Date: 1/13/17

MYLAR TAPE

Tape Size

9.00
0.20±0.05
0.50 Pitch
11.55±0.30
11.50
12.00
12.02
15.00

9.00
2.06
0.30±0.03
0.50
1.50 +0.10 0.00
0.90
2.60
2.70
19
1
6.00
5.96
1.50 +0.10 0.00
3.30 +0.10 0.00
2.30 +0.10 0.00
4.59
4.50
0.90
14.50
2.10
2.70

PCB Edge

Recommended P.C.B. Layout
(Tolerance ; ±0.05)

14.00
11.00
9.50
M3x0.5
4.55
19
1
0.50
8.00
9.00
14.50±0.20
11.28±0.25
14.25±0.38
14.22
6.08±0.38
11.43
6.23

2.0
5.96
6.00
1.0
4.59
4.50
2.2

Materials and Finish

Insulator: High Temp. Thermoplastic
UL94V-0 Rated , Color Black

Contacts: Copper Alloy

Plating: 15u" Gold Plating on Contact
Area, Gold Flash Plated   Tin
on Solder Tails

Shell: Stainless Steel Copper Alloy
Nickel Plated

Electrical Specifications

Contact Current Rating;
0.5A Min.

Contact Resistance;
30 milliohms Max.

Dielectric Withstanding Voltage;
300V AC